
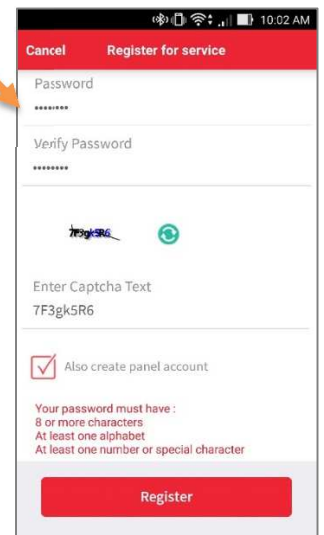
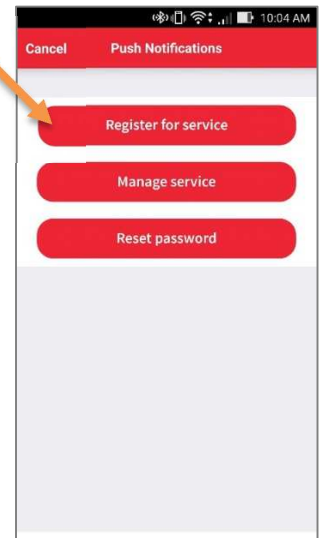


How To Activate Push Notification


- Log in to site
 - Connect to the Galaxy Intruder panel of your choice
 - Click on settings icon (left upper corner)
 - Select 'Push Notifications'
- One-time registration for Push Service
 - You will be presented with 3 options:
 - Register for Service (if you have not set up an account yet)
 - Manage service
 - Reset password
- Select *Register for Service*
 - Create a server account (e-mail & password)
 - Check the box *Also create panel account*
 - A confirmation e-mail will be sent

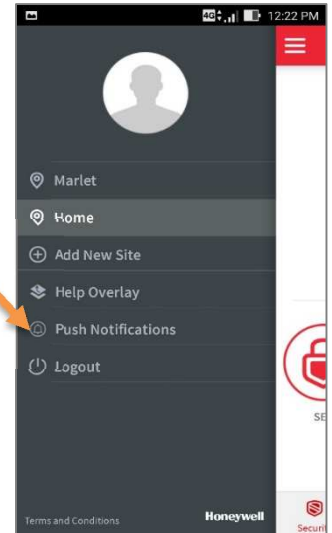

Honeywell

- Create panel account
 - Type in the site name*

*Note: identical to the naming of the site log in!

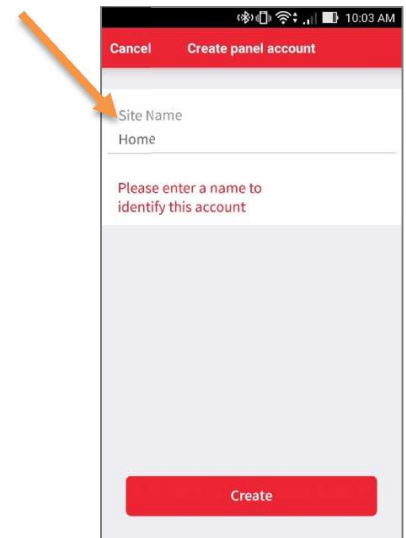


Cancel Create panel account

Site Name
Home

Please enter a name to identify this account

Create

- The app will generate an *installer-only* Account Number and Destination IP**
- **Note: Your installer will need this information for programming the activation of push in the Galaxy panel.

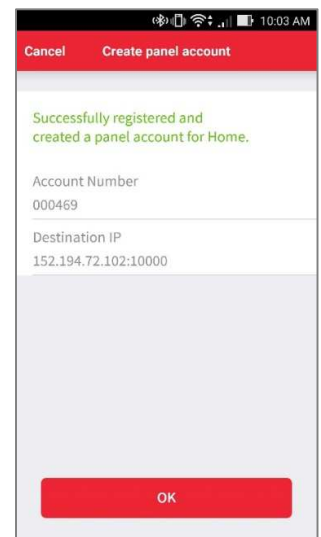

Cancel Create panel account

Successfully registered and created a panel account for Home.

Account Number
000469


Destination IP
152.194.72.102:10000

OK


Adding Mobile device from the device that is to be added.

(Make sure you have confirmed the e-mail before continuing)

- Select *Manage Service*
- Log in with your personal account
- Select *Manage panel accounts*

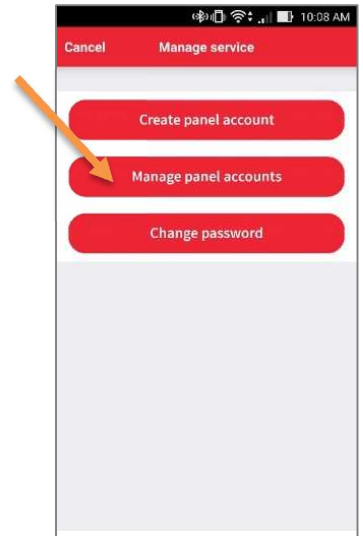


- Select the panel for which you want to add a mobile device and click *OK*

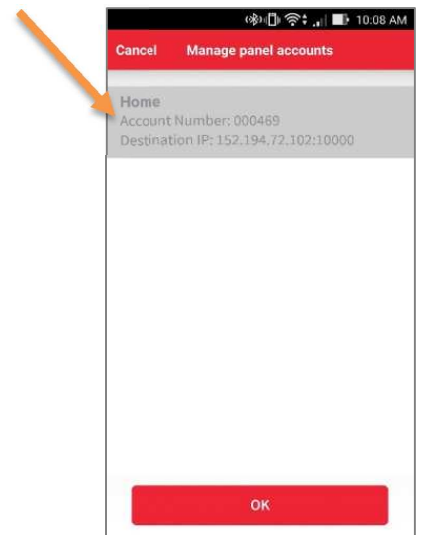

- Select *Add mobile device*



- Choose a name for your Mobile Device and click *Add*
- Push notification is now activated!

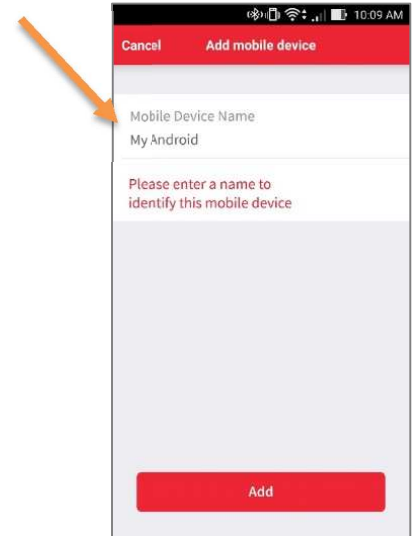

Installer Setup

Galaxy Flex/Flex+ Panels

- 7 steps for panel programming of Push Notification in panel
 1. **Set up Server IP Address** (Menu 56.1.1.1.4.1= 152.194.72.102 Port:10000)
 2. **Select Format** (Menu 56.1.1.1.4.2 = SIA Level 3)
 3. **Enter Account No** (Menu 56.1.2.1.1 – generated by the App – enter 6 digits)
 4. **Enable and Select Triggers** (Menu 56.1.2.1.2) *
Select the events which should be pushed to the Mobile devices
 5. **Select Sequence** (Menu 56.1.2.1.3)
 6. **Enable Encryption** (Menu 56.3.3.5.1 = Enabled)
Encryption is not mandatory but we recommended to enable it.
 7. **Test Push Notification** (Menu 56.7.1.Ent = Engineer Test)

Galaxy Dimension Panels

- 7 steps for panel programming of Push Notification in panel
 1. **Select Format** (Menu 56.4.02.1 = SIA Level 3) and **Enable and Select Triggers** *
Select the events which should be pushed to the Mobile devices
 2. **Set up Server IP Address** (Menu 56.4.02.2.1= 152.194.72.102)
 3. **Set up Port** (Menu 56.4.02.2.2 = 10000)
 4. **Enter Account No** (Menu 56.4.02.4 – generated by the App – enter 6 digits)
 5. **Select Protocol** (Menu 56.4.02.8 = TCP)
 6. **Enable Encryption** (Menu 56.4.09.1 = On)
Encryption is not mandatory but we recommended to enable it.
 7. **Test Push Notification** (Menu 56.4.05.Ent = Engineer Test)

* Please note that all events that will be transmitted will be pushed to all registered devices, therefore we recommend not to enable Autotest.